


HRV-R Series Specifications

(The -R series is new as of 6/2023)

- Same design as original HRV Series - except with new 7.5" port spacing
- Allows for easy "Slide-in" replacement of old style Pentair Triton Series Filters
- NSF listed
- Reinforced and larger top access port
- Flat-Surface design for side-wall bulkhead port seating
 - No more "curved seal" attempts like competing brands
- Superior wound fiberglass technology supports an industry leading
- 10 year warranty
- 58 psi operating pressure
- Unique Fishtail EnviroPro underdrain design
 - extends time between backwashing and
 - uses less backwash water each time

EnviroPro Lateral Design

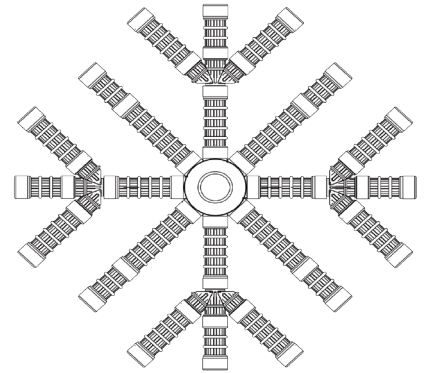

HRVR SIDE MOUNT SAND FILTER


PART NUMBER	PRODUCT DESCRIPTION	NSF
22207248R	HRVR 24 2" BH CONN. 58 PSI (NSF) 7.5" PORT SPACING	
22207308R	HRVR 30 2" BH CONN. 58 PSI (NSF) 7.5" PORT SPACING	
22207368R	HRVR 36 2" BH CONN. 58 PSI (NSF) 7.5" PORT SPACING	

VALVES

PART NUMBER	PRODUCT DESCRIPTION
2290591	MPV 2" SM NPT WITH PIPING AND HRVR UNION 7.5" PORT

DIMENSIONS

MODEL	B	C	H	J	K	L	S	T	V	Z
	INCHES									
HRVR 24	24.6	37.3	23.1	19.0	4.2	2.5	21.125	13.625	27.8	32.1
HRVR 30	31.1	41.5	23.5	23.0	5.7	4.7	23.750	16.250	29.4	36.3
HRVR 36	36.5	45.5	30.8	24.6	7.4	1.9	26.250	18.750	35.8	40.2

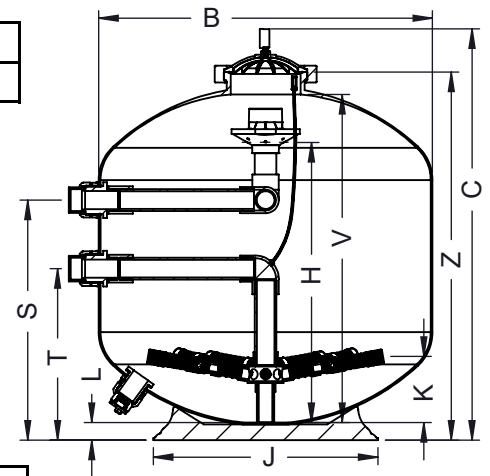

SPECIFICATIONS

MODEL	PORT SIZE	BED DEPTH	INNER DIAM.	FILTER AREA	MAX FLOW	MAX POOL SIZE	BACK-WASH FLOW RATE	MEDIA VOLUME	GLASS PEARL 0.6-0.8	SAND 0.6-1.2
	INCH	INCH	INCH	SQ FT	GPM	GAL	GPM	GAL	LB	LB
HRVR 24	2.0	11.0	24	3.14	63	22,680	47-63	24	360	325
HRVR 30	2.0	12.0	30	4.91	98	35,280	74-98	45	660	600
HRVR 36	2.0	13.0	36	7.07	141	50,760	106-141	64	950	850